

Your configuration



Your configuration code is

M5.AARR.1.2.0.0.3.3

The transmission of the configuration code is an important piece of information for identifying your desired variant both in the quotation phase and in the order phase.

Selection

Housing length [mm]	330
Housing diameter [mm]	170


Technical data


Description	Ø	Ø
	90mm	140mm
Avg. rot. speed [min-1]	200	150
Max. Speed [min-1]	400	300
Protection class according to IEC 60529	IP 50	
Operating temperatur [°C]	-20 to +70	
Lifetime up to [m rev]	50	
Current load [A]	Max. 63	
Voltage load [V AC]	Max. 630	
Cable length rotor [m]	3	
Cable length stator [m]	3	
Total weight [kg]	13.8	


Quantity	Name	Description	Width	V	A	Ways
1	PE functional unit	At a voltage V >= 60 V, a PE functional unit is automatically added to your configuration.	0		25	1
2	Functional unit A		2	630	25	3 + PE
2	Functional unit R (CC-Link)		1	30	3	2 x CC-Link
1	Dummy module	Dummy module to fill out empty space	1		0	0
4	Module center ring	Module center ring	0		0	0

Position	Name	Width	V	A	Ways
Front	Mounting flange		0	0	

Circuit diagram

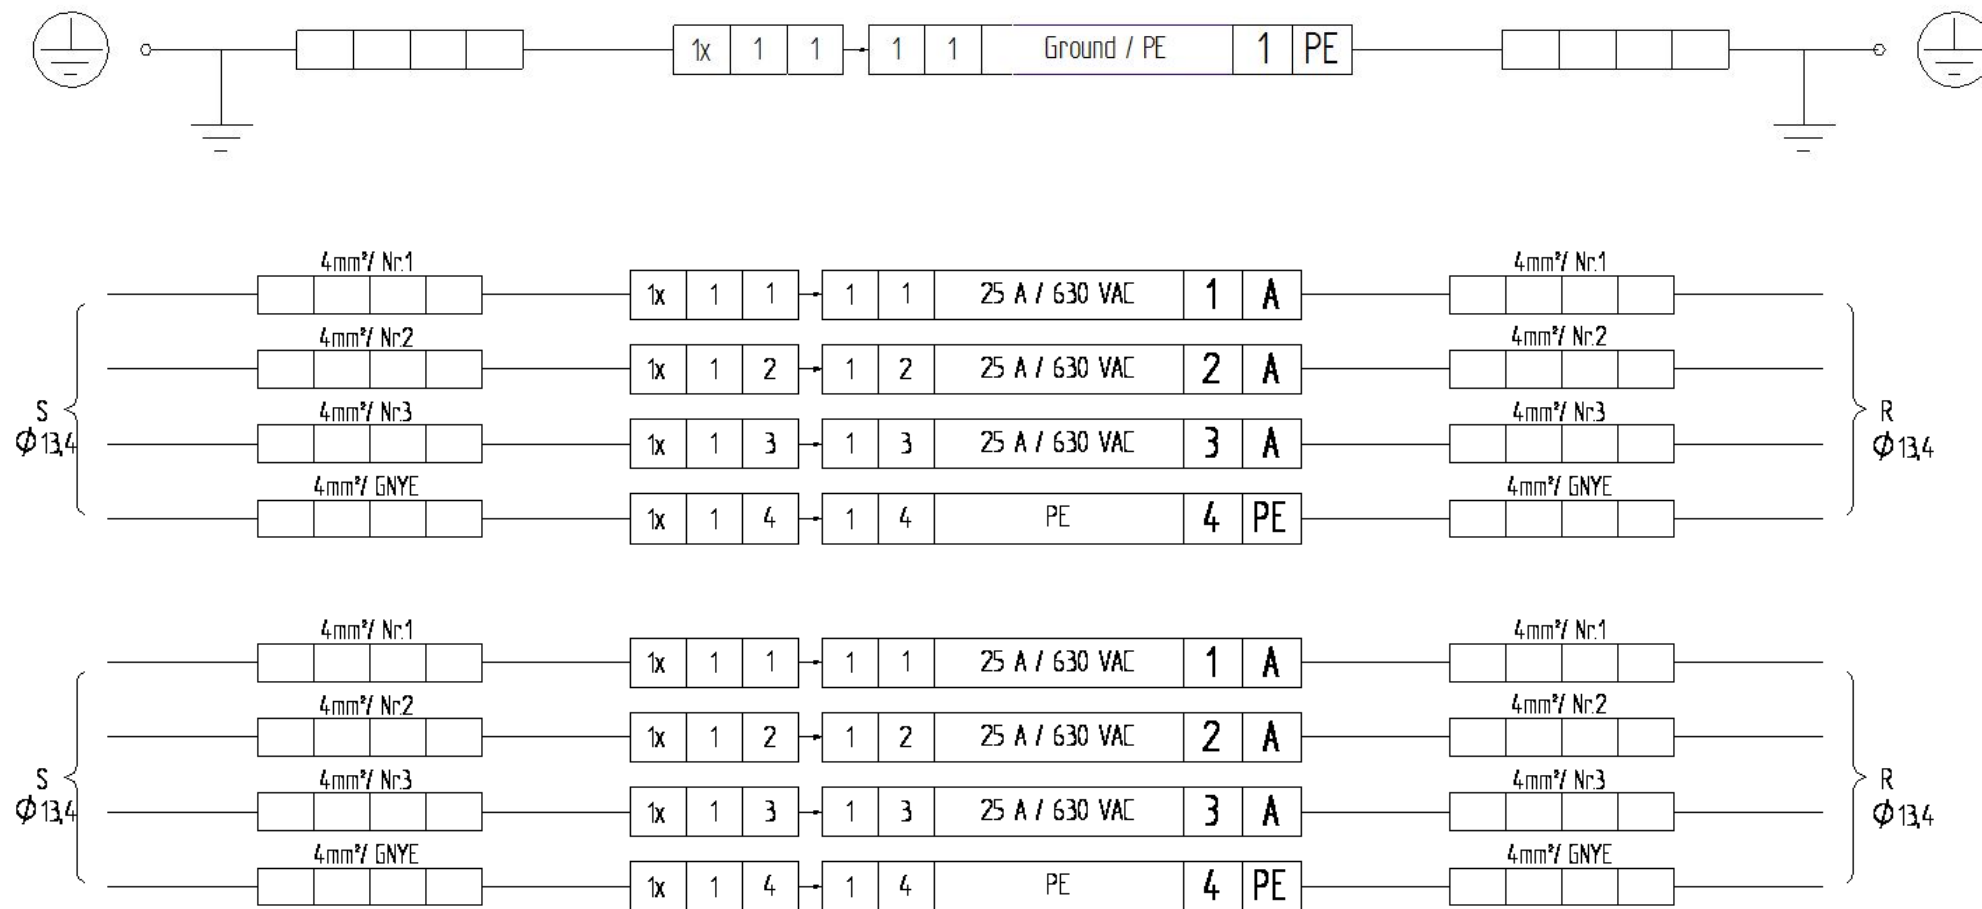

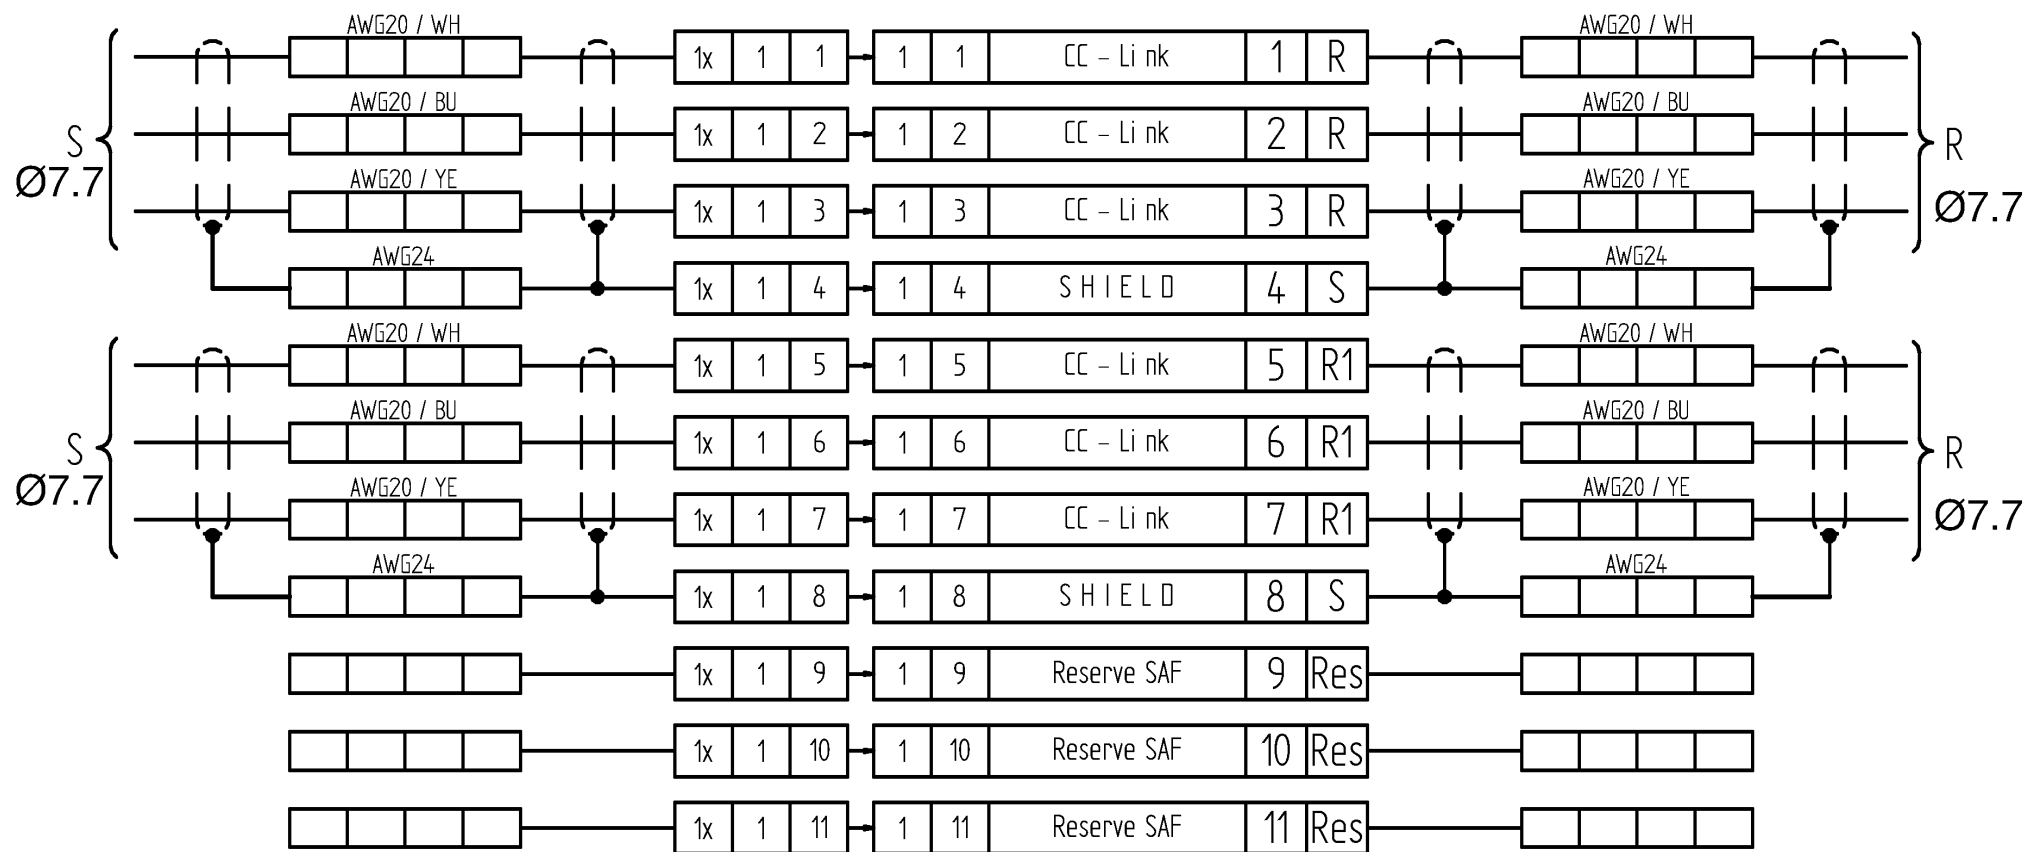

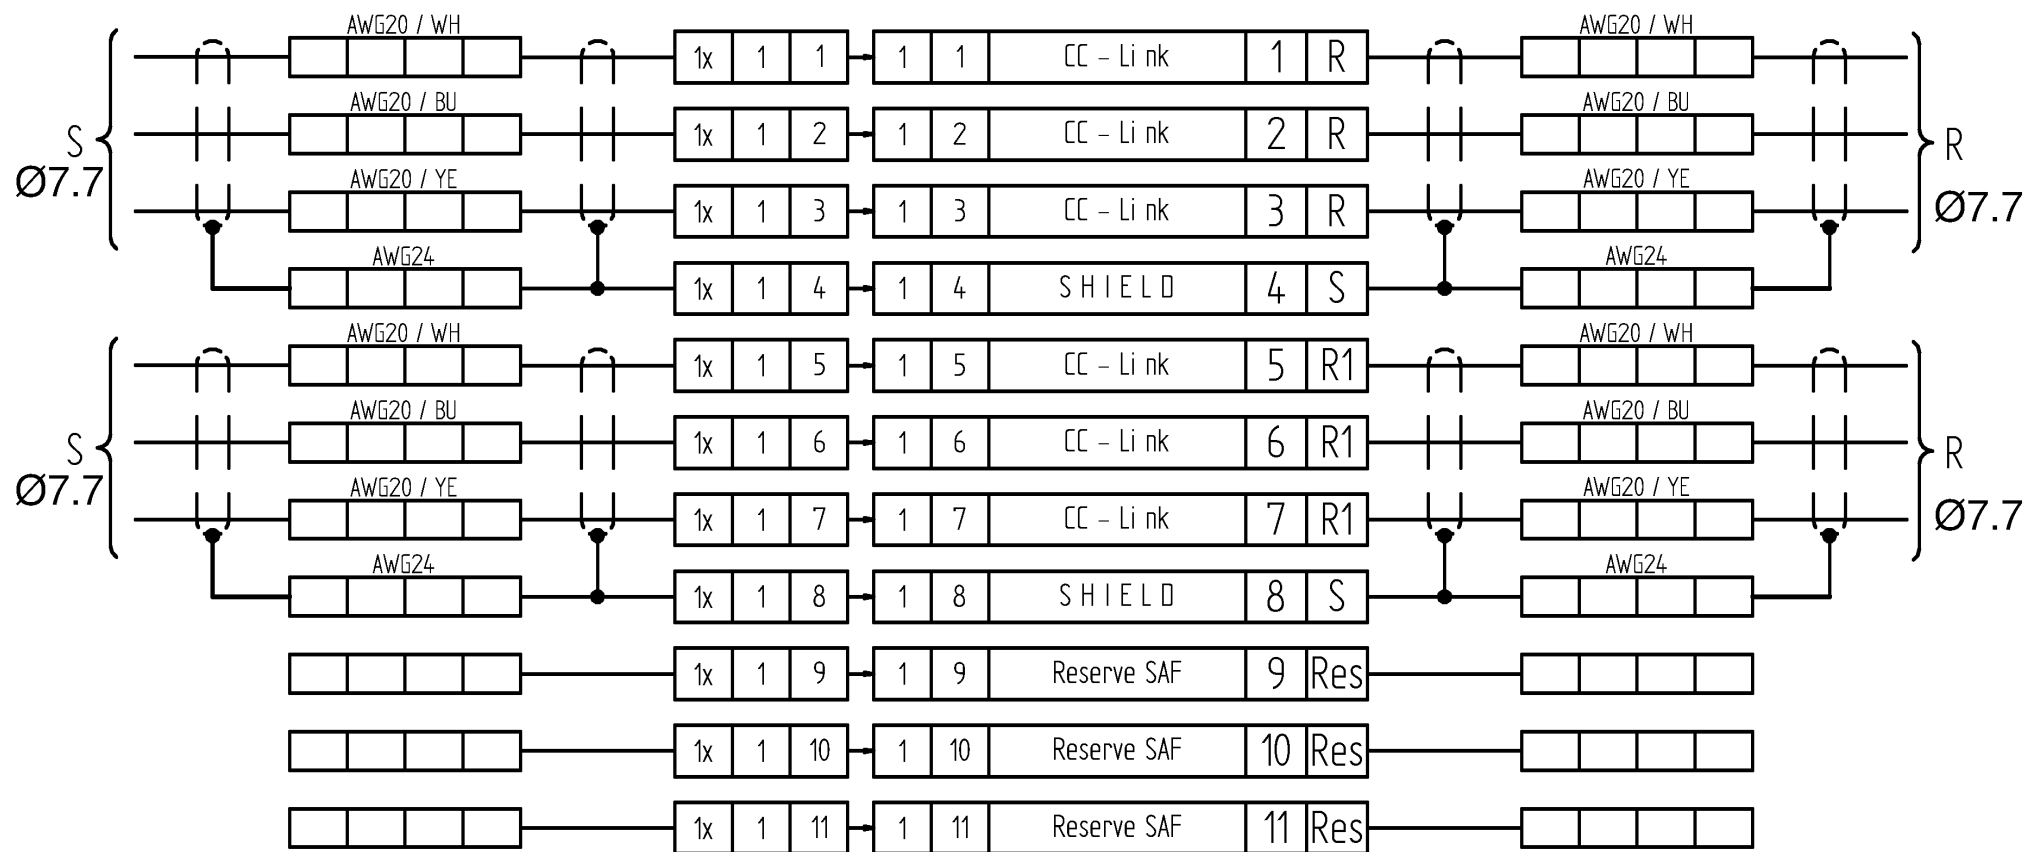

Drawing

