

Your configuration



Your configuration code is

M3.FP.1.3.0.0.3.3

The transmission of the configuration code is an important piece of information for identifying your desired variant both in the quotation phase and in the order phase.

Selection

Housing length [mm]	283
Housing diameter [mm]	170


Technical data


Description	Ø	Ø
	90mm	140mm
Avg. rot. speed [min-1]	200	150
Max. Speed [min-1]	400	300
Protection class according to IEC 60529	IP 50	
Operating temperatur [°C]	-20 to +70	
Lifetime up to [m rev]	50	
Current load [A]	Max. 63	
Voltage load [V AC]	Max. 630	
Cable length rotor [m]	3	
Cable length stator [m]	3	
Total weight [kg]	6.8	


Quantity	Name	Description	Width	V	A	Ways
1	PE functional unit	At a voltage V >= 60 V, a PE functional unit is automatically added to your configuration.	0		25	1
1	Functional unit F		2	125	6	16
1	Functional unit P (Ethernet)		1	30	3	Ethernet + 4
1	Module center ring	Module center ring	0		0	0

Position	Name	Width	V	A	Ways
Front	Media rotary joint 1/2inch (1-channel) + flange		0	0	1-Kanal

Circuit diagram

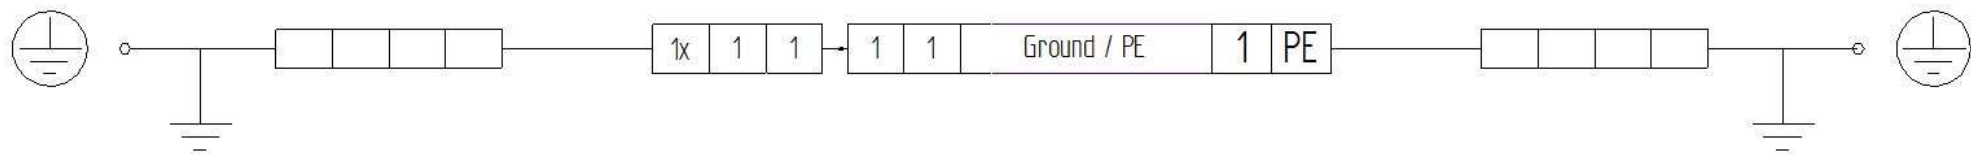

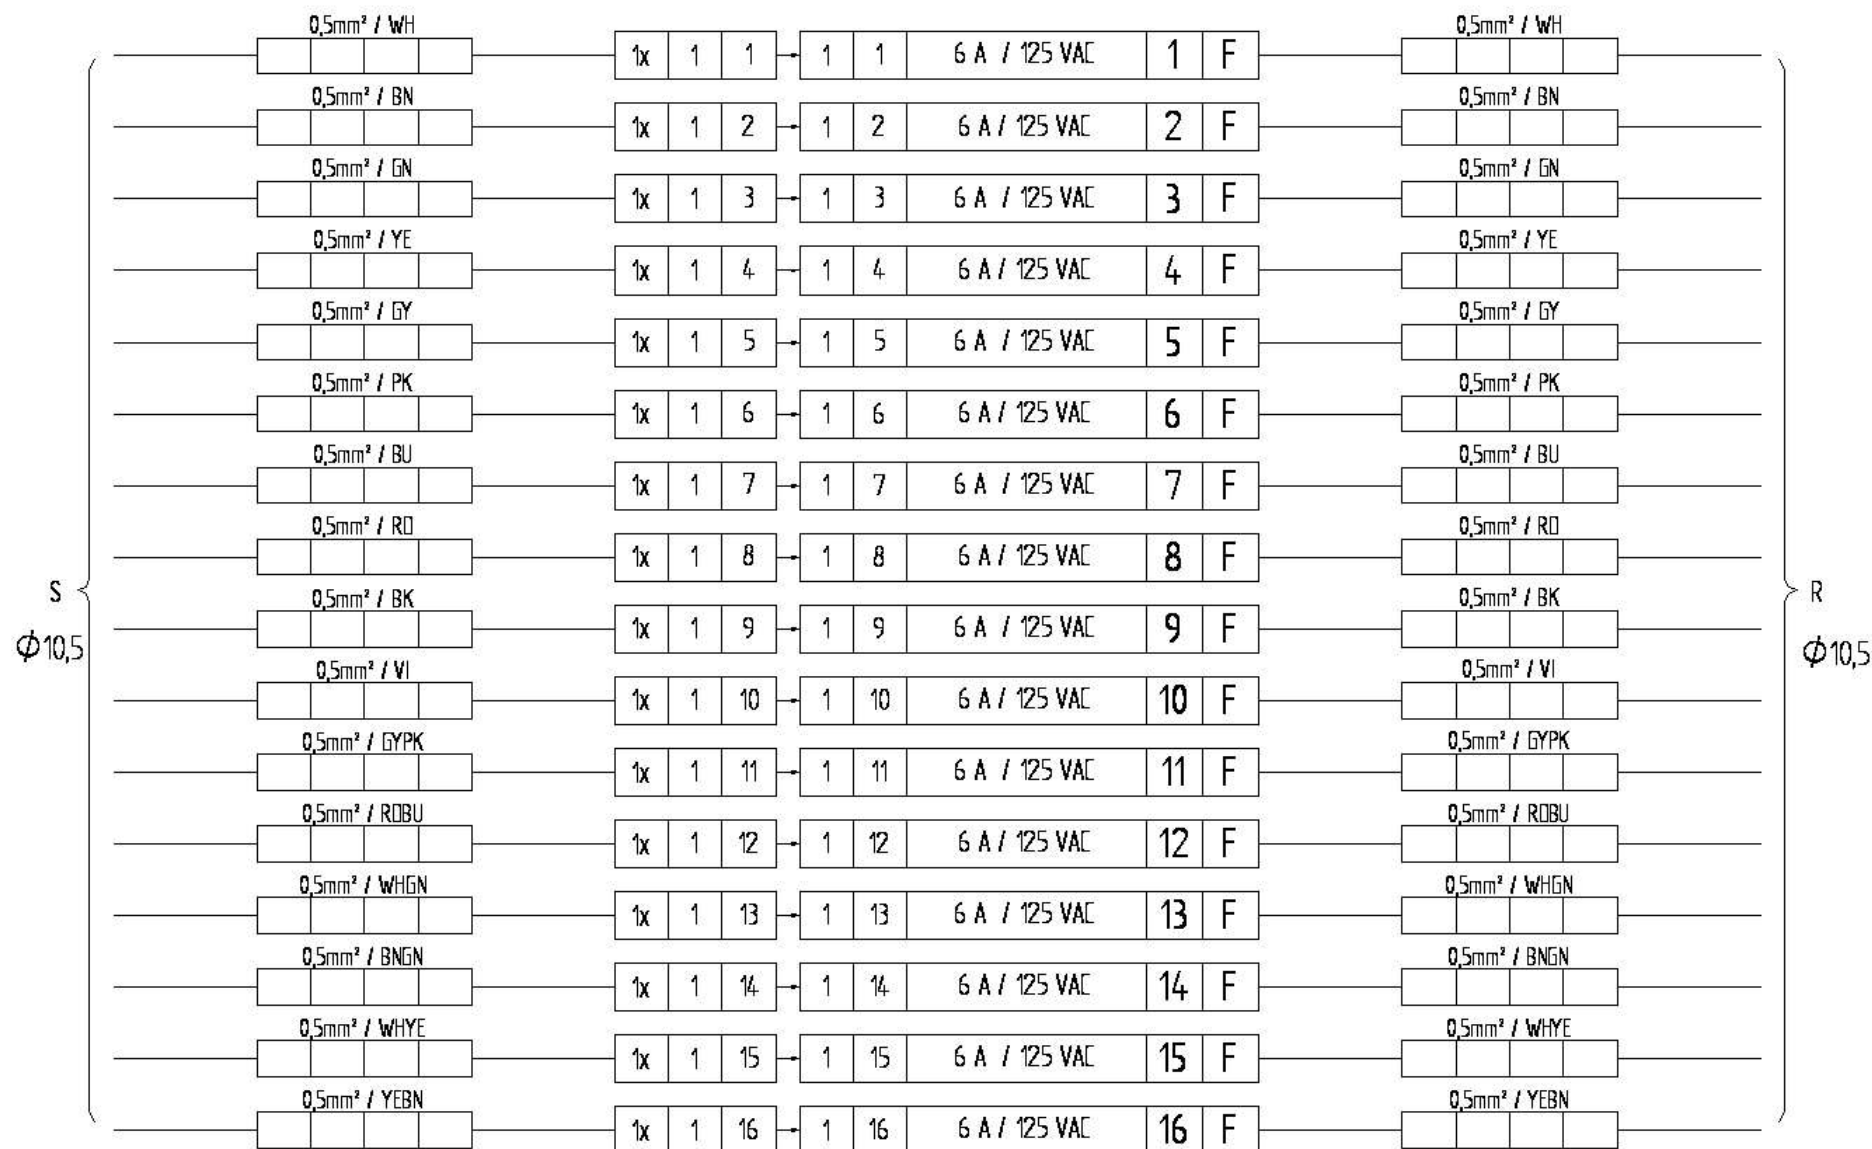

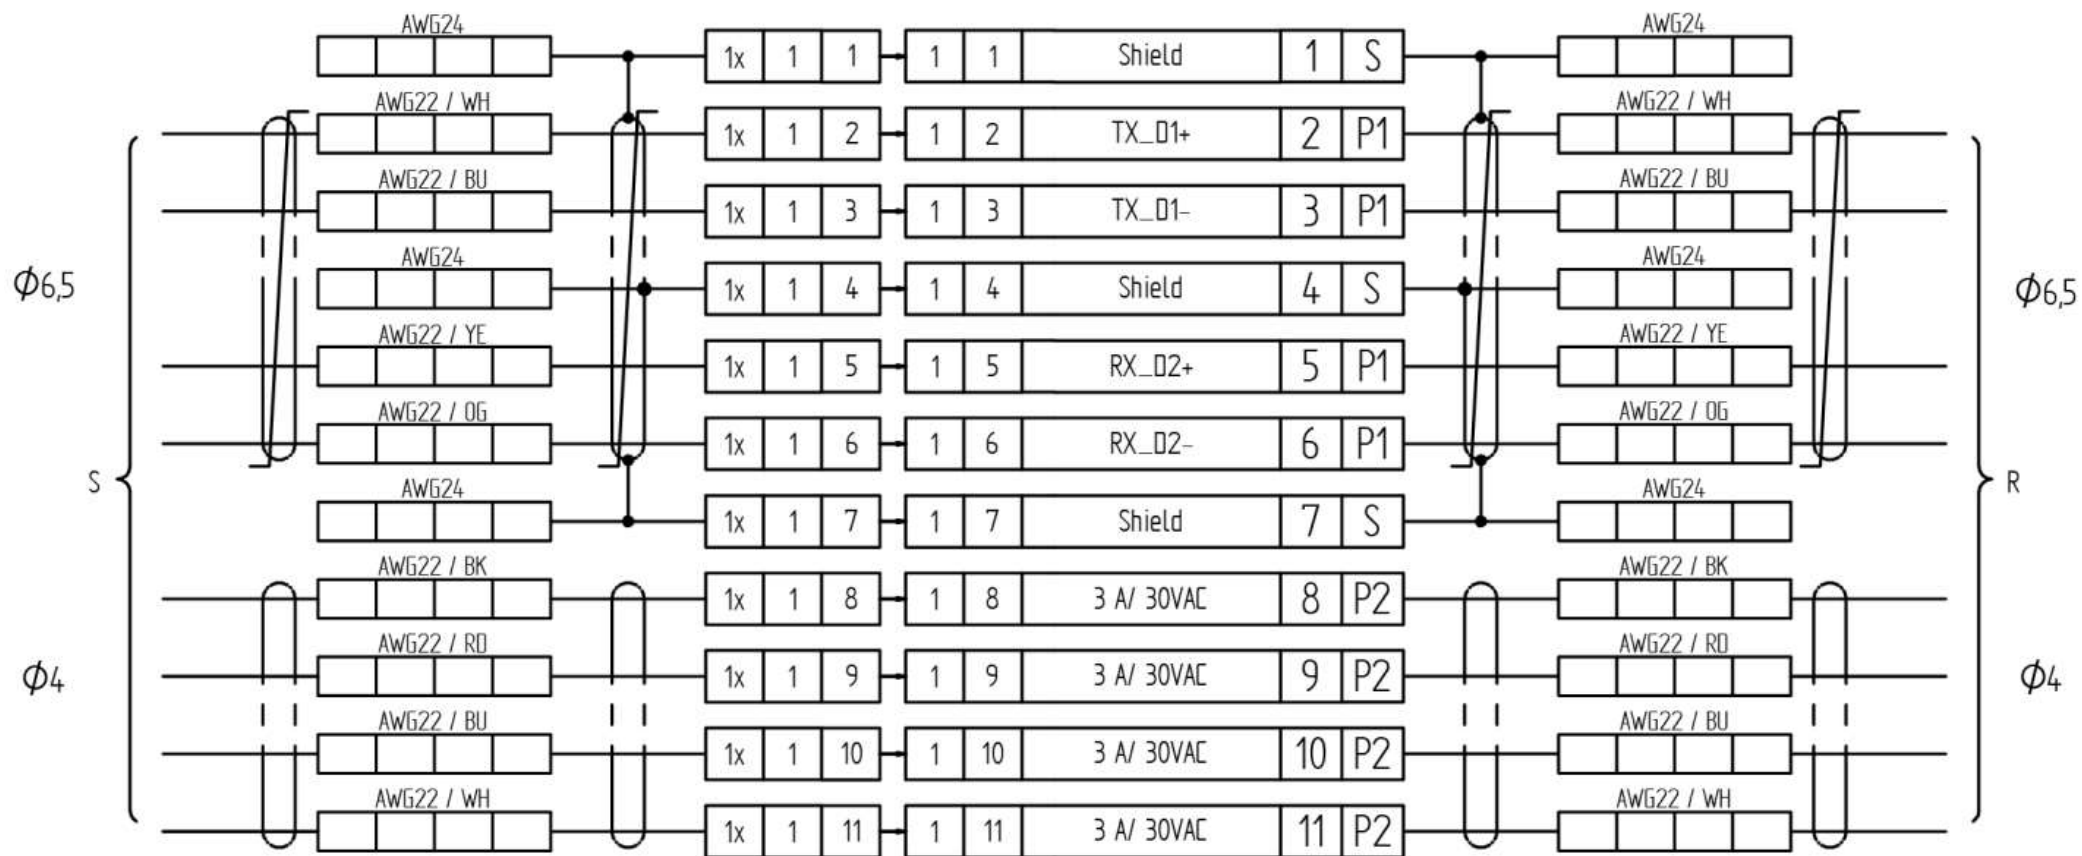

Drawing

