

Your configuration



Your configuration code is

M4.BPPP.1.0.2.K4.3.3

The transmission of the configuration code is an important piece of information for identifying your desired variant both in the quotation phase and in the order phase.

Selection

Housing length [mm]	733
Housing diameter [mm]	160


Technical data


Description	Ø	Ø
	90mm	140mm
Avg. rot. speed [min-1]	200	150
Max. Speed [min-1]	400	300
Protection class according to IEC 60529	IP 50	
Operating temperatur [°C]	-20 to +70	
Lifetime up to [m rev]	50	
Current load [A]	Max. 63	
Voltage load [V AC]	Max. 630	
Total weight [kg]	42.1	


Quantity	Name	Description	Width	V	A	Ways
1	PE functional unit	At a voltage $V \geq 60$ V, a PE functional unit is automatically added to your configuration.	0		25	1
1	Functional unit B		2	400	18	4 + PE
3	Functional unit P (Ethernet)		1	30	3	Ethernet + 4
3	Module center ring	Module center ring	0		0	0

Position	Name	Width	V	A	Ways
Gigabit	GigabitEthernet unit		24	1	8 + shield

Position	Name	Width	Channel	Cross section	Pressure	Medium	Connections
Back	Media rotary joint 1/2" (4-channel)						

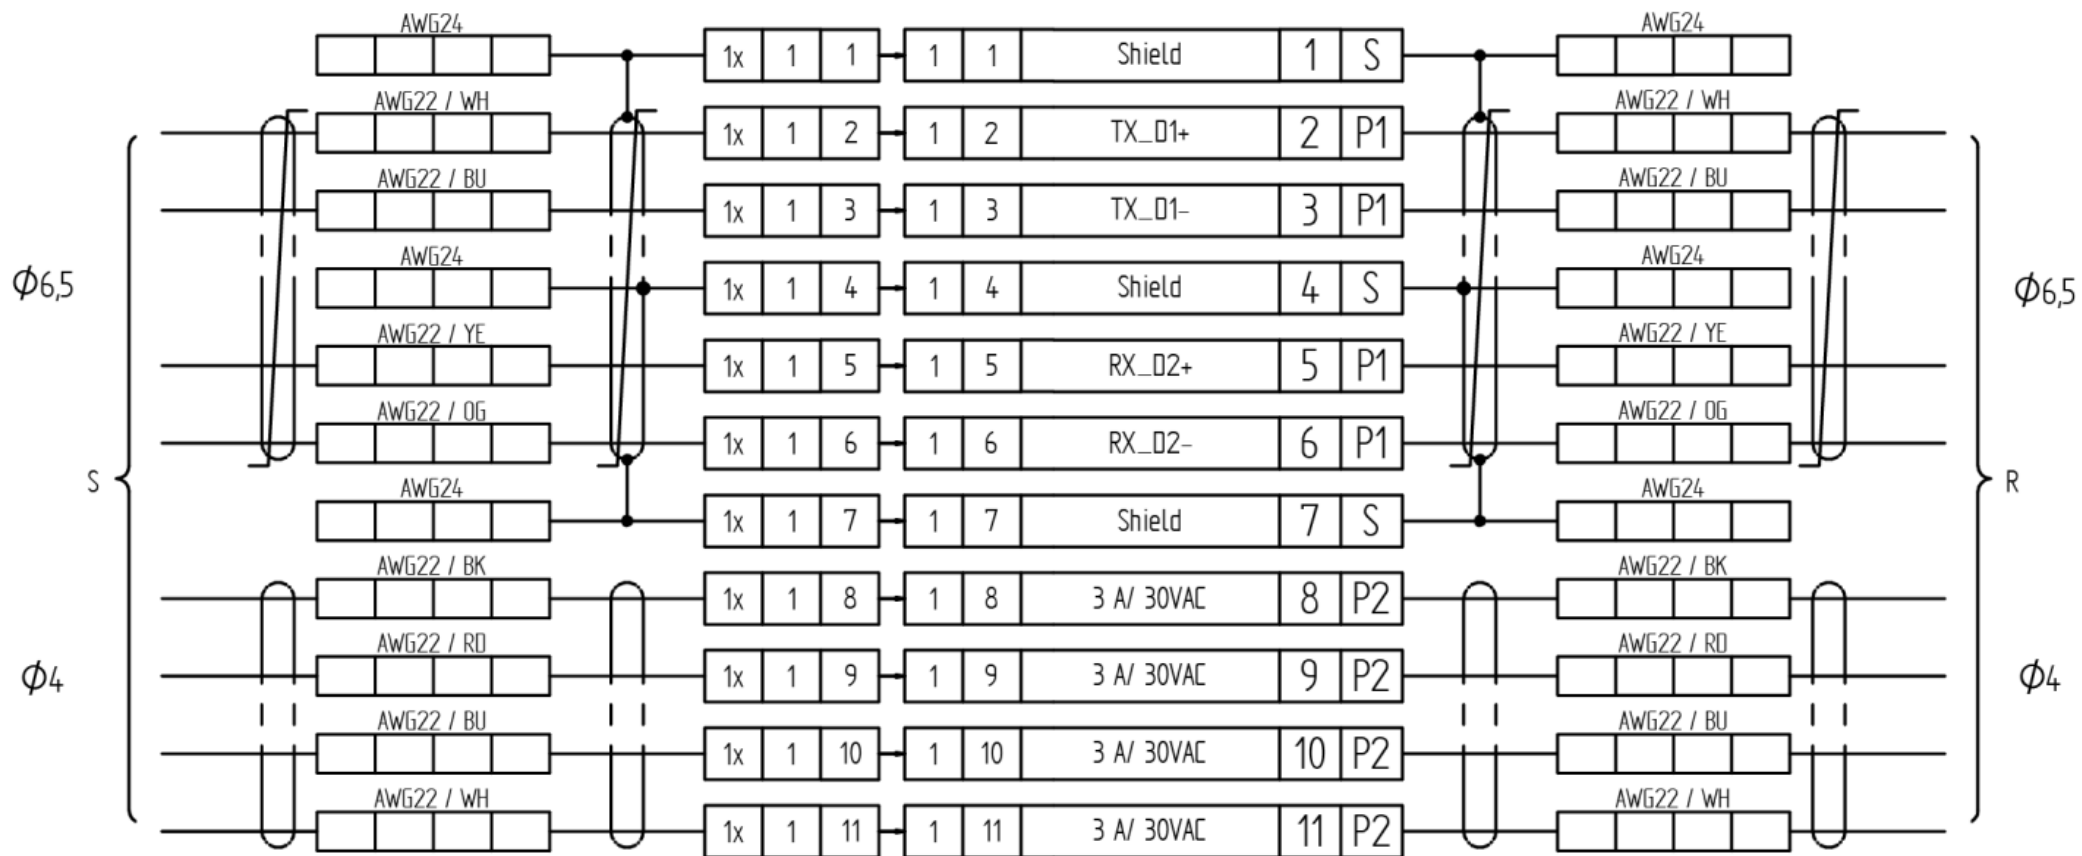

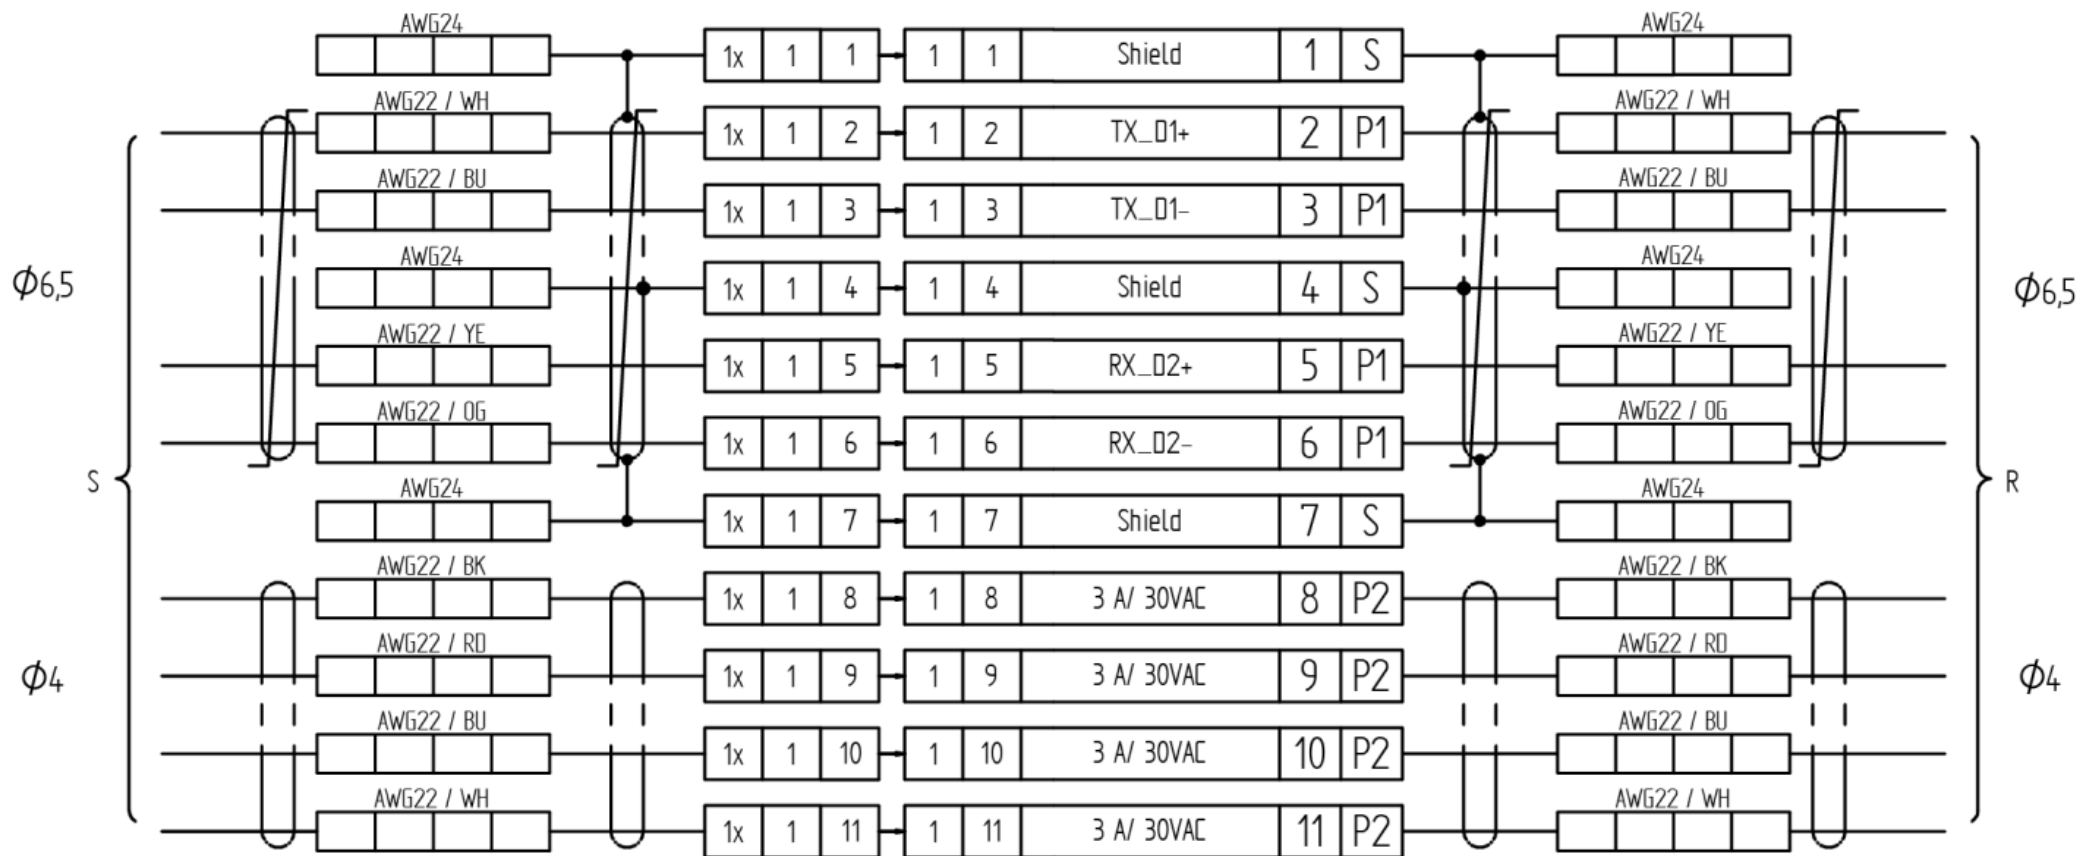

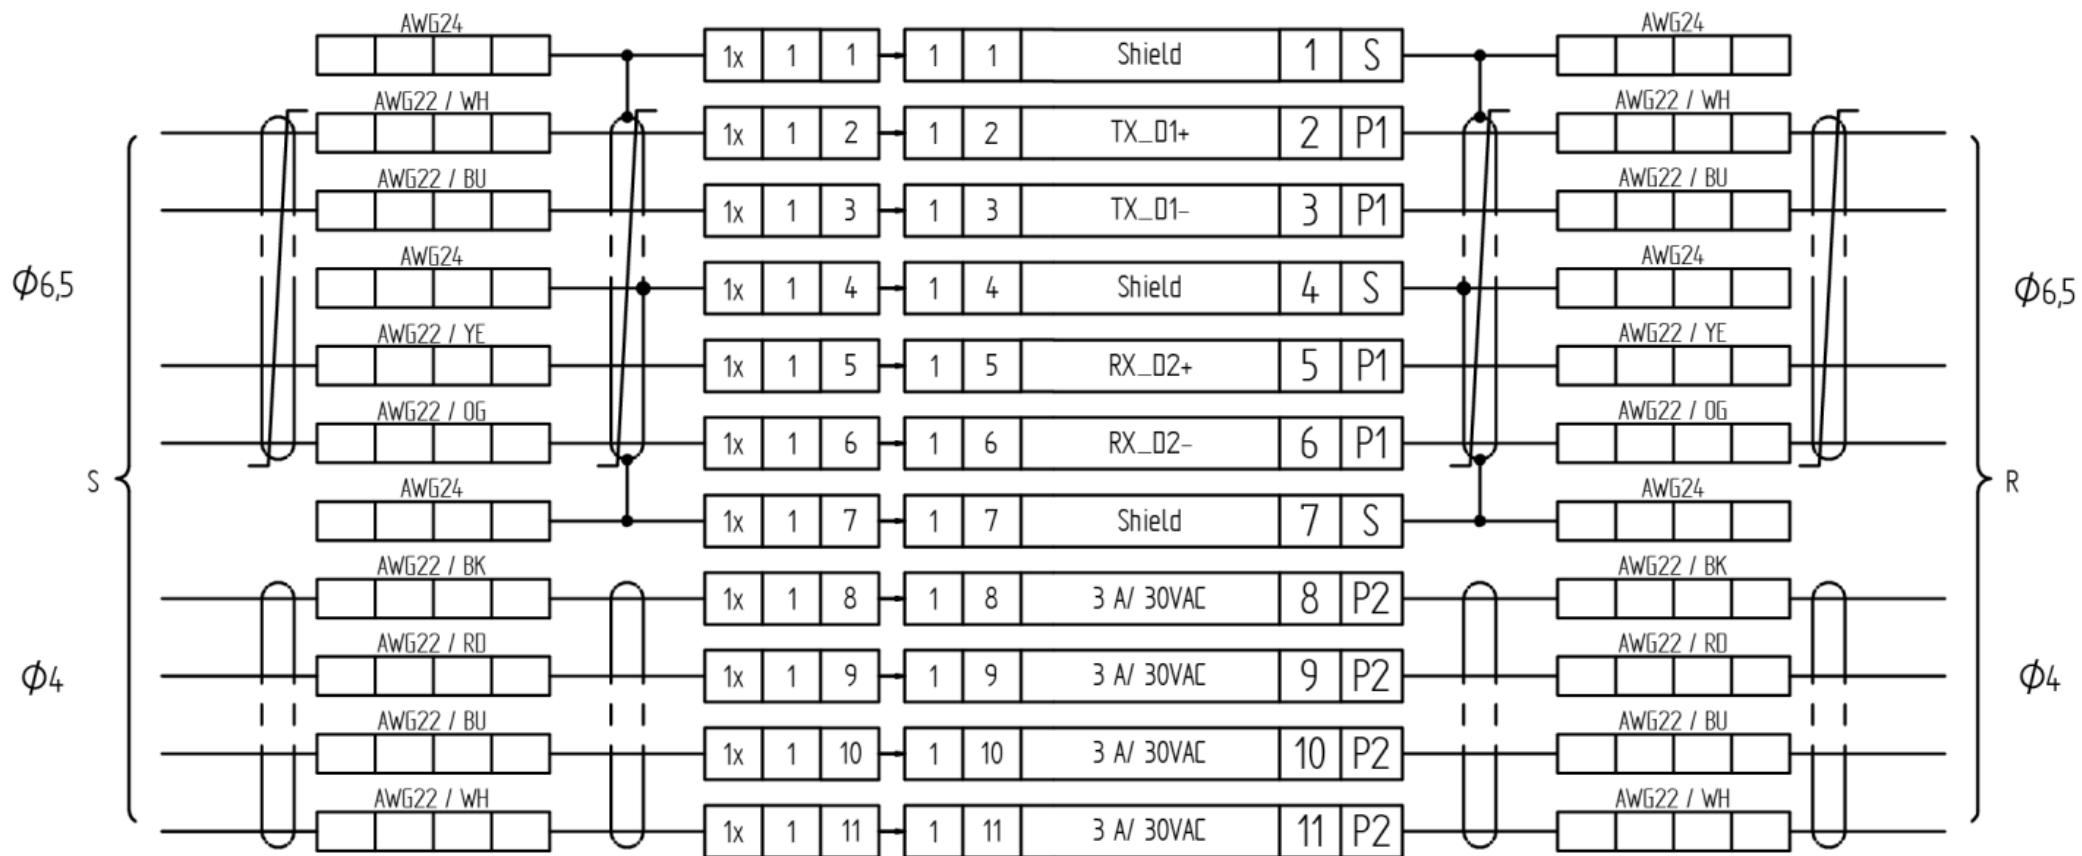

All efforts are the property of Schottling Global Services and are to be treated as confidential. The information, data and/or utilization as well as the communication of its content to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All parts and components shown in this document are original and designed for Schottling Global Services and a breach of a third specification by counterfeiters has no impact on the warranty.