

Your configuration



Your configuration code is

M1.EP.0.0.0.0.3.3

The transmission of the configuration code is an important piece of information for identifying your desired variant both in the quotation phase and in the order phase.

Selection


Housing length [mm]	116
Housing diameter [mm]	90


Technical data

Description	Ø	Ø
	90mm	140mm
Avg. rot. speed [min-1]	200	150
Max. Speed [min-1]	400	300
Protection class according to IEC 60529	IP 50	
Operating temperatur [°C]	-20 to +70	
Lifetime up to [m rev]	50	
Current load [A]	Max. 63	
Voltage load [V AC]	Max. 630	
Cable length rotor [m]	3	
Cable length stator [m]	3	
Total weight [kg]	2.8	

Quantity	Name	Description	Width	V	A	Ways
1	Ground track dummy	Used instead of a PE-track	1		0	1
1	Functional unit E		1	30	3	14 + Shield
1	Functional unit P (Ethernet)		1	30	3	Ethernet + 4

Circuit diagram

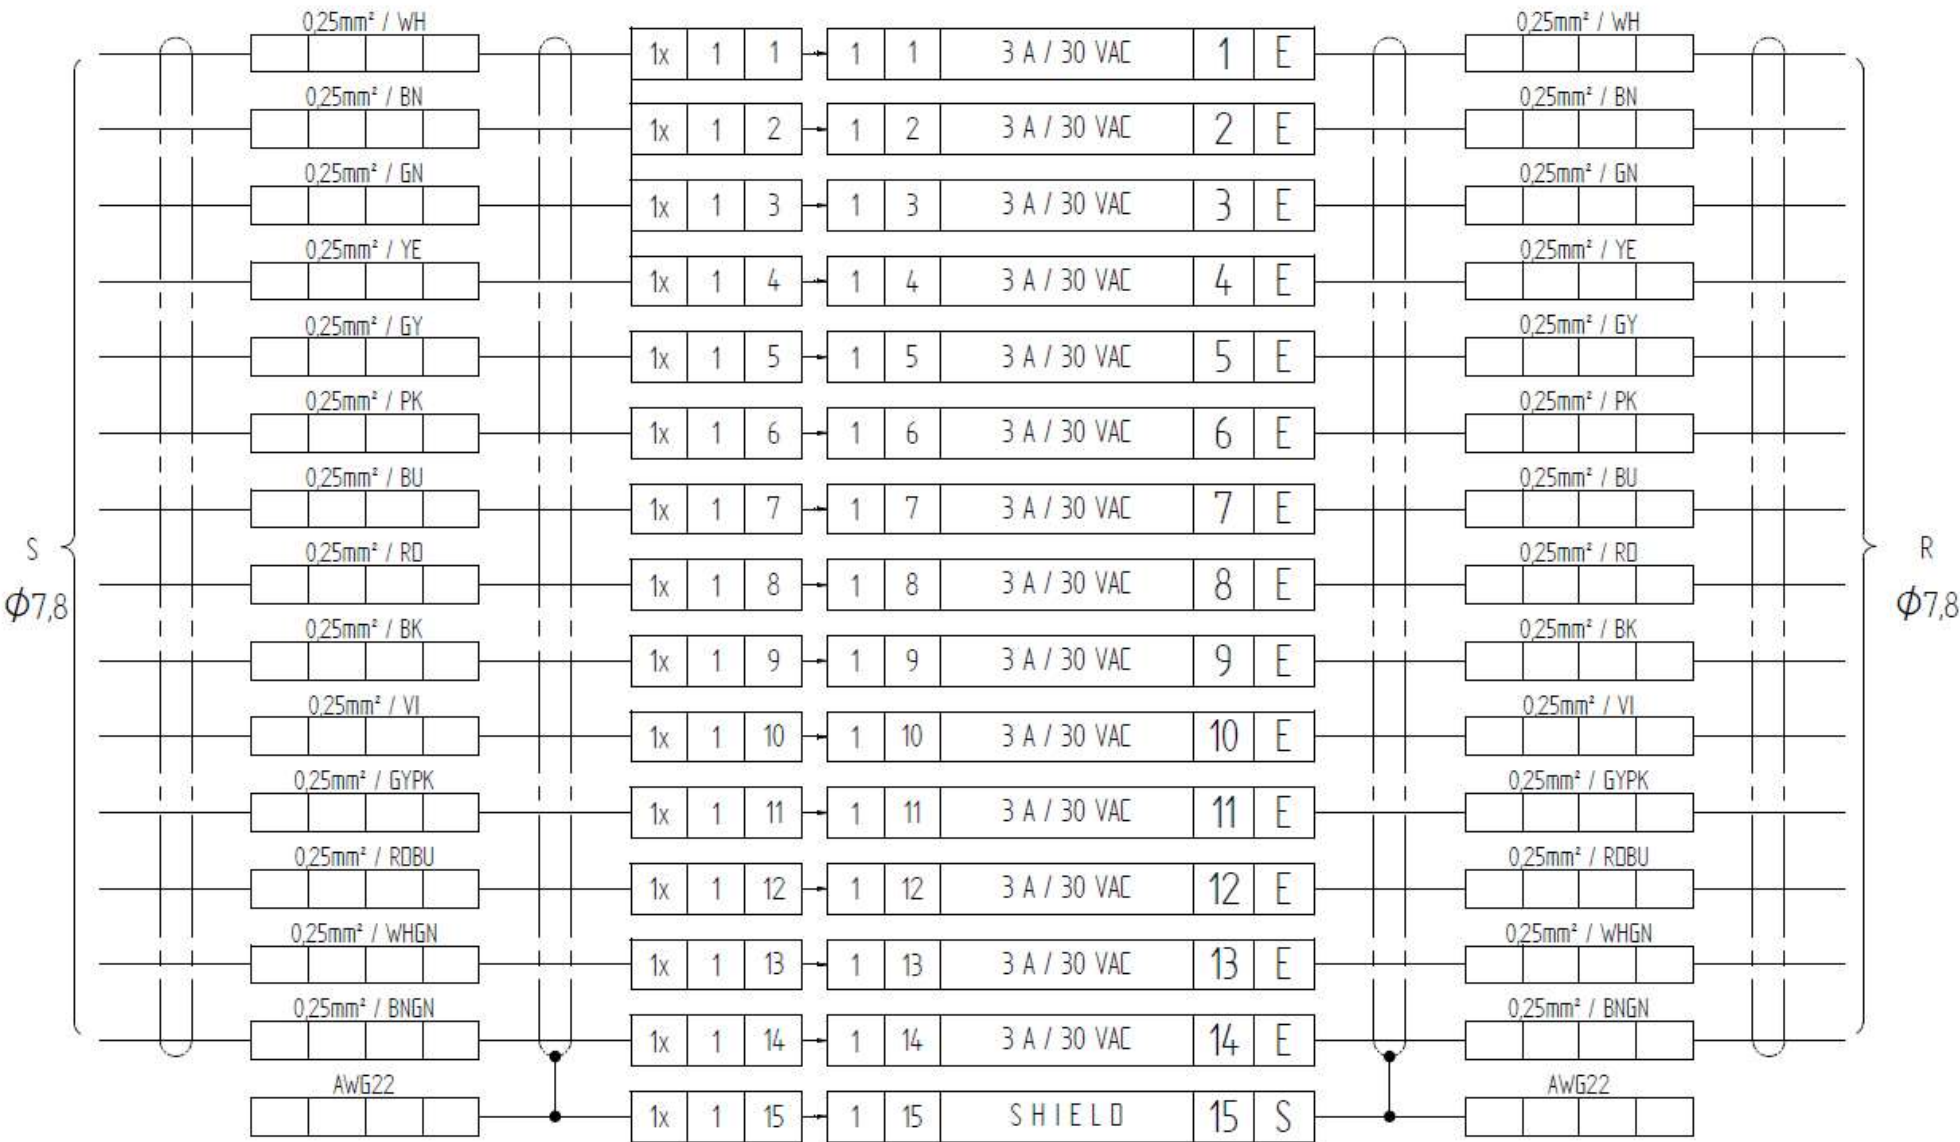

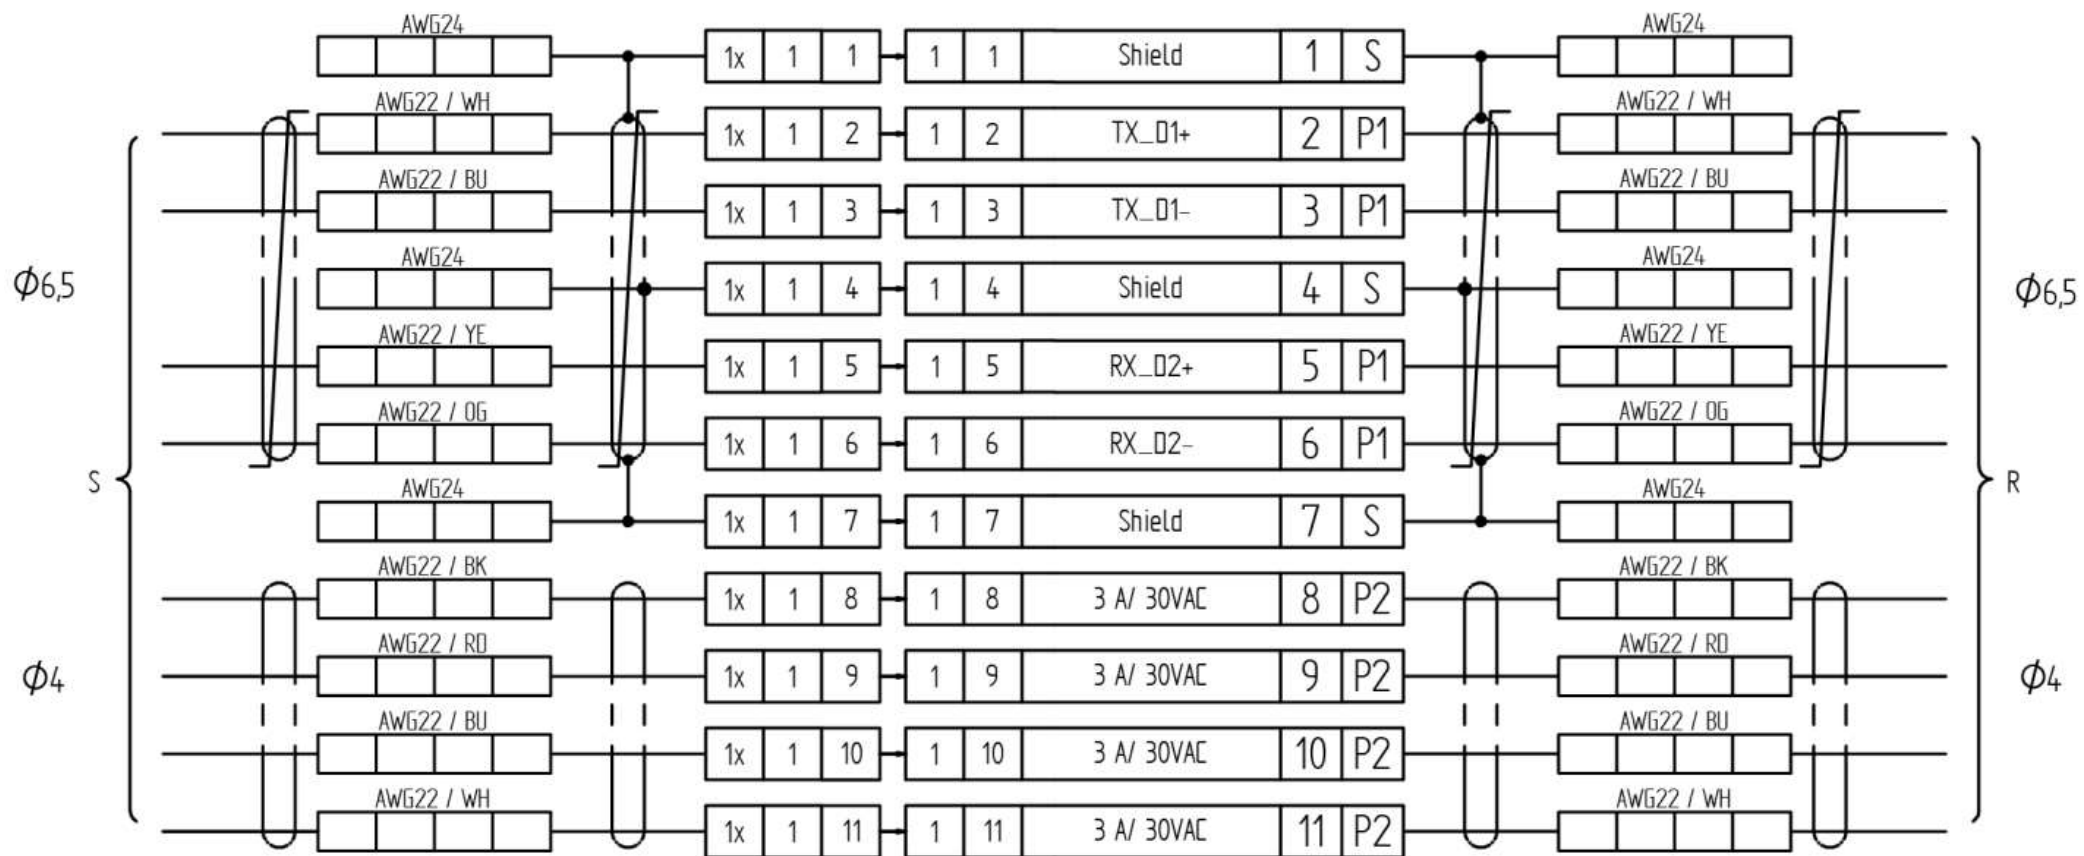

All drawings are the property of Schaeffler GmbH Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Drawings will be held liable for the payment of damages. In the event of the loss of a set of a patent, utility model or design rights (recorded in the German Patent Office) the applicant must inform the patent office immediately.

All parts and components shown in this document are originally created and developed by Schaeffler AG (Germany) and all permits at a cost application. Any customization has no impact on origin and export classification.

