

Your configuration



Your configuration code is

M1.DP.1.0.0.0.3.3

The transmission of the configuration code is an important piece of information for identifying your desired variant both in the quotation phase and in the order phase.

Selection

Housing length [mm]	116
Housing diameter [mm]	90


Technical data

Description	Ø	Ø
	90mm	140mm
Avg. rot. speed [min-1]	200	150
Max. Speed [min-1]	400	300
Protection class according to IEC 60529	IP 50	
Operating temperatur [°C]	-20 to +70	
Lifetime up to [m rev]	50	
Current load [A]	Max. 63	
Voltage load [V AC]	Max. 630	
Cable length rotor [m]	3	
Cable length stator [m]	3	
Total weight [kg]	2.6	

Quantity	Name	Description	Width	V	A	Ways
1	PE functional unit	At a voltage $V \geq 60$ V, a PE functional unit is automatically added to your configuration.	0		25	1
1	Functional unit D		1	125	9	6
1	Functional unit P (Ethernet)		1	30	3	Ethernet + 4

Circuit diagram



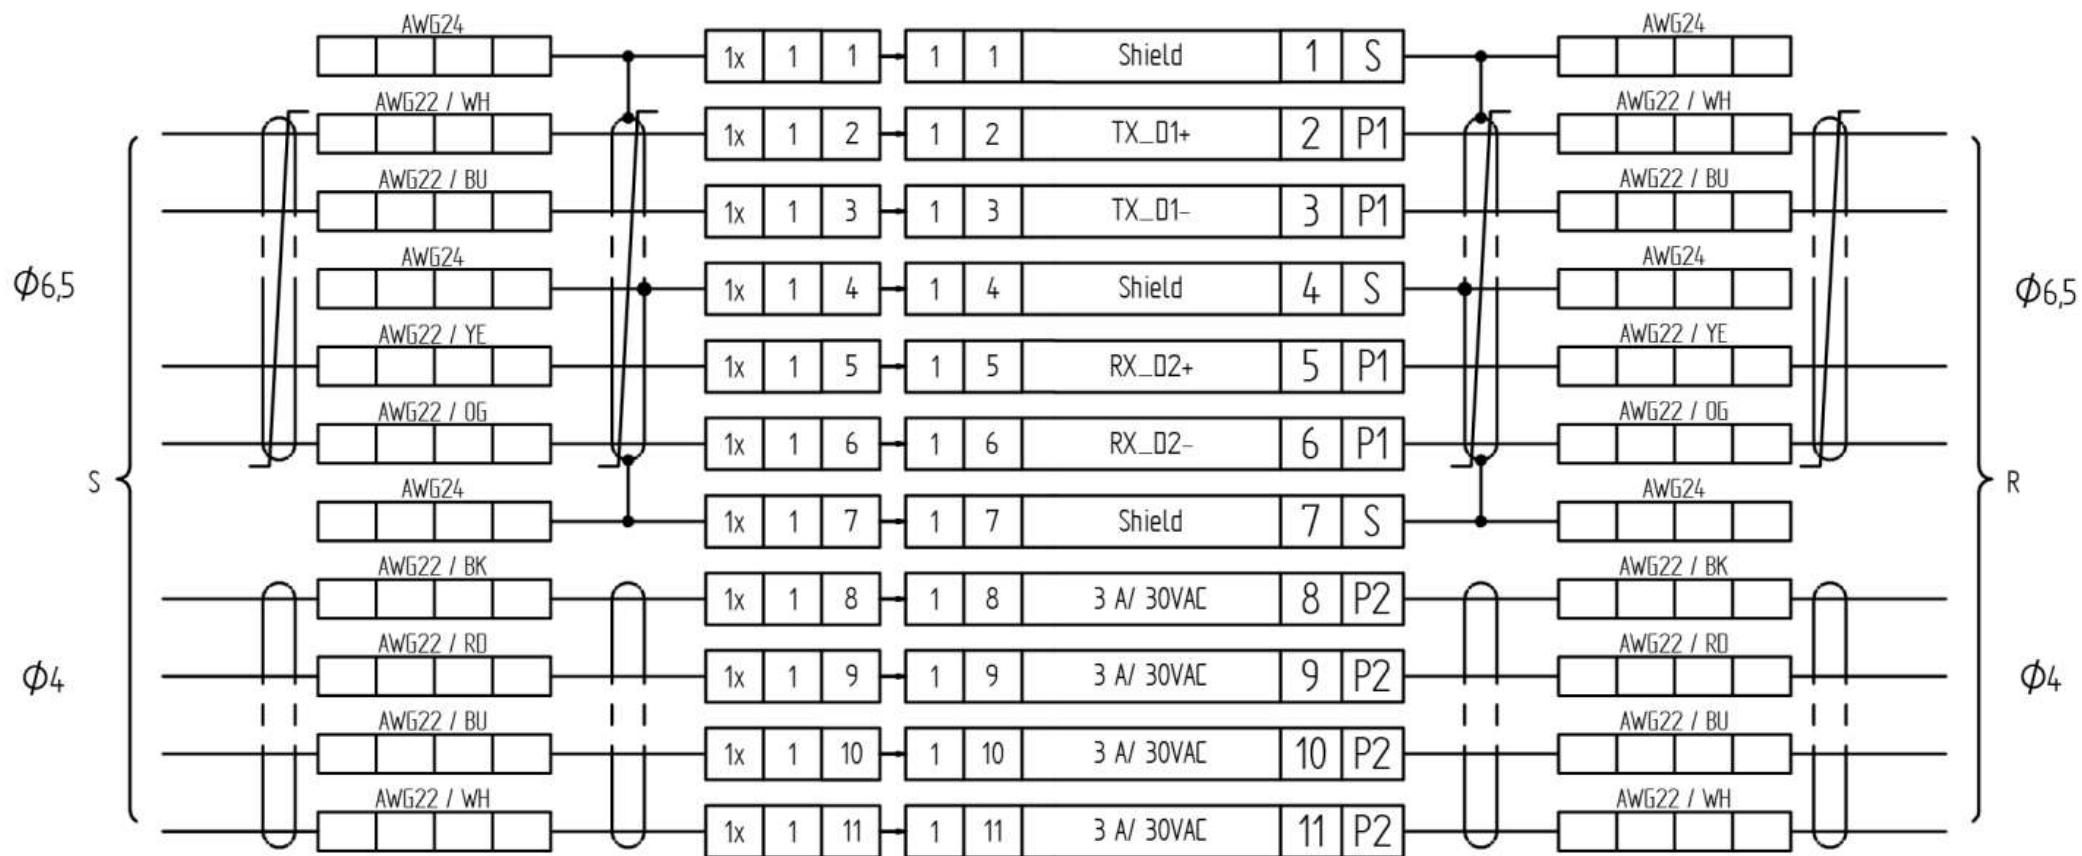

All drawings are the property of Schiefelung GmbH Germany and are to be treated as confidential. The reproduction, distribution and alteration as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. Any rights reserved in the event of the loss of a patent, utility model or design.

