

Your configuration



Your configuration code is

M1 . P . 0 . 1 . 0 . 0 . 3 . 3

The transmission of the configuration code is an important piece of information for identifying your desired variant both in the quotation phase and in the order phase.

Selection

Housing length [mm]	190.5
Housing diameter [mm]	90


Technical data

Description	Ø	Ø
	90mm	140mm
Avg. rot. speed [min-1]	200	150
Max. Speed [min-1]	400	300
Protection class according to IEC 60529	IP 50	
Operating temperatur [°C]	-20 to +70	
Lifetime up to [m rev]	50	
Current load [A]	Max. 63	
Voltage load [V AC]	Max. 630	
Cable length rotor [m]	3	
Cable length stator [m]	3	
Total weight [kg]	2.1	

Quantity	Name	Description	Width	V	A	Ways
1	Ground track dummy	Used instead of a PE-track	1		0	1
1	Functional unit P (Ethernet)		1	30	3	Ethernet + 4
1	Dummy module	Dummy module to fill out empty space	1		0	0

Position	Name	Width	Channel	Cross section	Pressure	Medium	Connections
Front	Media rotary joint 1/4 inch (1-channel)						

Circuit diagram

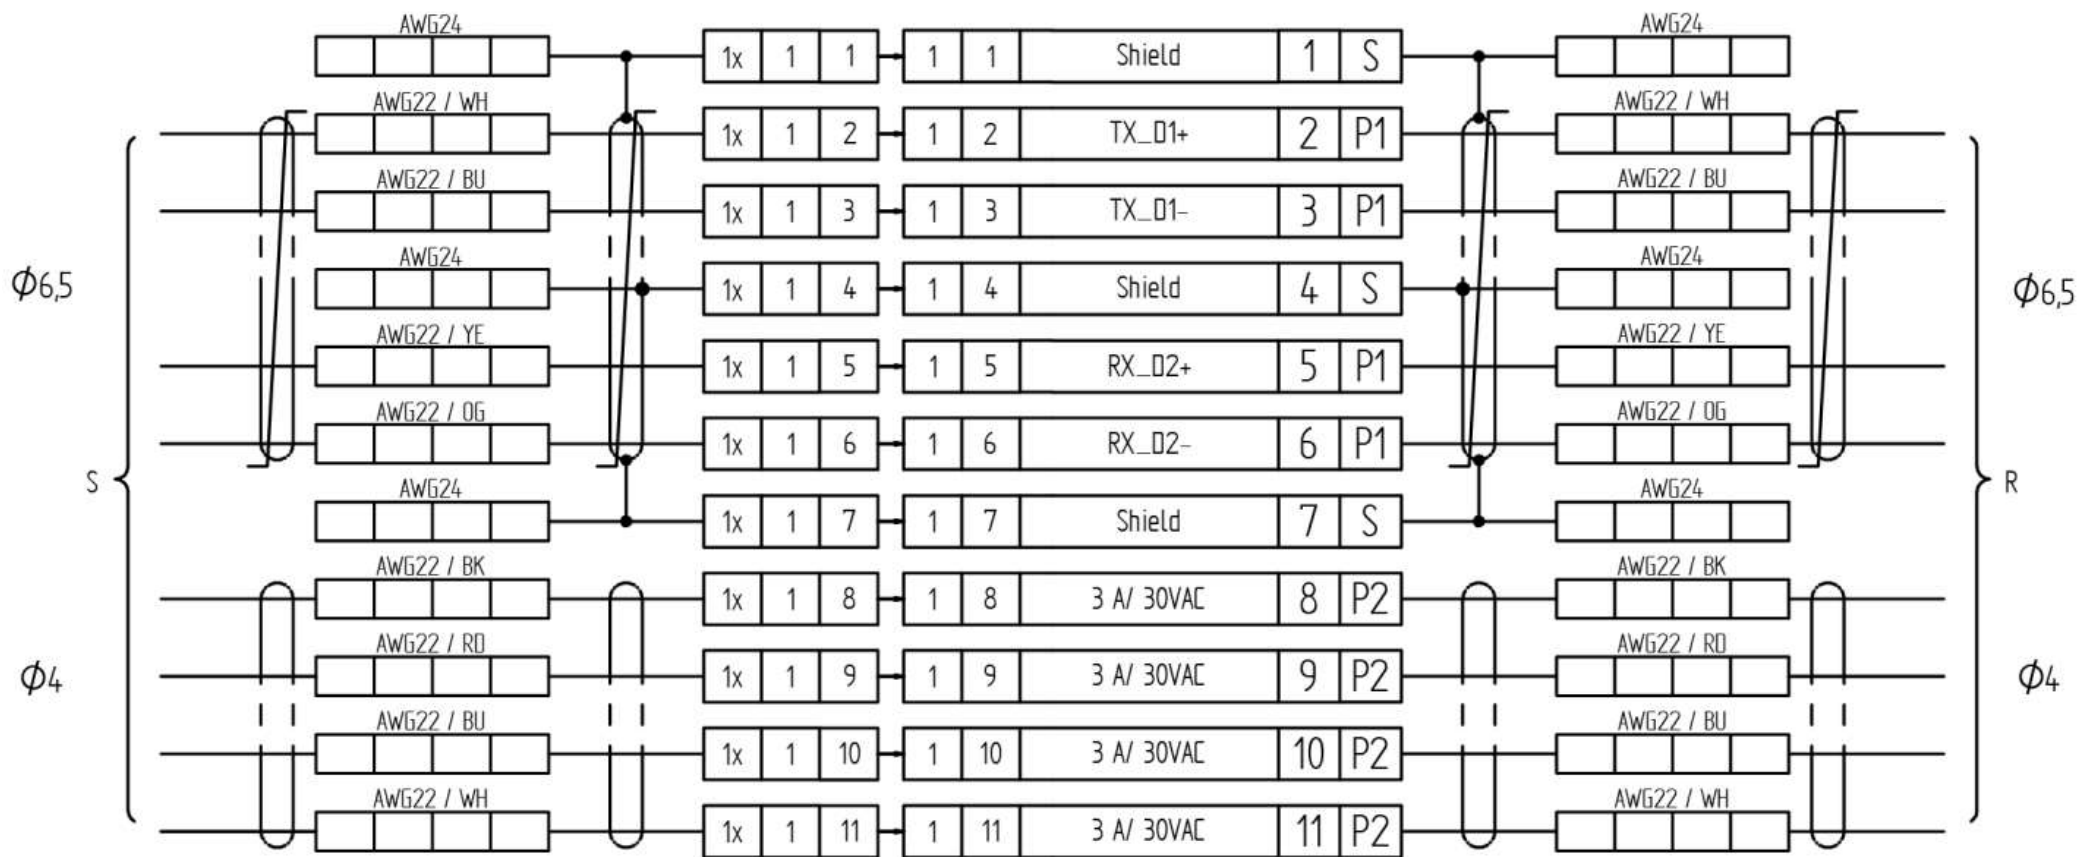

All drawings are the property of Solvings Gatter Germany and are to be treated as confidential. The reproduction, distribution and utilization as well as the communication of its contents to others without express authorization is prohibited. Drawings will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent will be held as if they were held as such.

